



KAR INDUSTRIAL INC.

www.kar.ca

Toronto | Montréal | Edmonton

SUMMER SIZZLER

Dial Indicators Inch | AGD2

- Graduation: 0.001"/0.0005"
- Stem Diameter: Ø3/8"
- Easy to read dial face
- Internal tolerance marker
- Flat back (attached) and lug back supplied
- With counter pointer
- Short form calibration certificate included



910042

0-0.25"
Graduation: 0.001"
Dial Reading: 0-100
Accuracy: ±0.001"

Code 910042 **42.47**

0-0.50"
Graduation: 0.0005"
Dial Reading: 0-50
Accuracy: ±0.0015"

Code 910045 **47.24**

0-0.25"
Graduation: 0.0005"
Dial Reading: 0-50
Accuracy: ±0.0015"

Code 910043 **47.24**

0-1"
Graduation: 0.001"
Dial Reading: 100-0
Accuracy: ±0.002"

Code 910046 **39.43**

0-0.50"
Graduation: 0.001"
Dial Reading: 0-100
Accuracy: ±0.002"

Code 910044 **41.77**

0-1"
Graduation: 0.0005"
Dial Reading: 0-50
Accuracy: ±0.002"

Code 910047 **48.73**



Telescoping Gauges

- Spring-loaded plunger expands within the bore (or groove), allowing determination of the internal diameter
- With a knurled clamp



5/16-6"/8-150mm
6pcs - A, B, C, D, E, F

Code 910174 **47.28**

Electronic LEEB Hardness Testers

- Impact Device D
- Large screen (5 inches), showing all functions and parameters with background light
- Hardness test can be taken at any angle including inverted
- A wide measuring range supports the hardness of all metallic materials. Hardness results are directly displayed in HRB, HRC, HV, HB, HSD, HL, Mpa hardness scales
- Supports a variety of Richter sensors (DC, DL, C, D+15, G)
- Memory stores 500 records
- Tolerance alarm function
- Wireless printing capability
- Automatic power off after five minutes
- Battery: Lithium-ion, rechargeable
- Printer included
- Short form calibration certificate included



Printer included



170-960HLD | Accuracy: ±5HLD

Code 910074 **1565.77**



YOUR AUTHORIZED KAR DISTRIBUTOR:



Caliber Industrial Supply
5500 Tomken Rd, Unit #2
Mississauga, ON L4W 2Z4
www.caliberindustrial.com

Mississauga: 905.624.5524
Toronto: 416.626.7151
Toll Free: 1.800.465.5743
sales@caliberindustrial.com

MAKING IT EASY TO DO BUSINESS WITH SINCE 1954... CONTACT YOUR LOCAL KAR DISTRIBUTOR TODAY!

SUMMER SIZZLER

DID YOU KNOW?

We carry the complete range of
SPI Precision Measuring Tools online
— far beyond what's shown here.

Visit KAR.ca for more details



Microscope Flashlight

Standard
Type F - Pen Style



Code 03894193 **36.42**

Electronic Protractor (Angle Gauge)

- Measuring range: 0-360°
- Resolution: 0.05°
- Accuracy: ±0.15°
- Direct display angle values
- Easy lock angle system
- Specific HOLD key to lock the data
- V-groove design
- Battery: CR2032

Code 910069 **116.33**



Step Drills

High Speed Steel

Bright/Uncoated Finish | 3 Flats | Spiral Flute



Max. Hole Dia. (Inch)	Shank Diameter (Inch)	Number of Steps	Min. Hole Dia. (Inch)	Step Length (Inch)	Code	Price
1/2	1/4	13	1/8	1/8	43274760	16.48
1/2	1/4	6	3/16	3/8	43274778	16.48
7/8	3/8	12	3/16	1/8	43274745	36.18
3/4	3/8	9	1/4	1/8	43274752	29.74
1	3/8	9	13/32	1/8	43274737	39.20
1-1/8	3/8	2	7/8	1/8	43274711	53.23
1-3/8	3/8	5	7/8	1/8	43274729	66.93

Magnetic Base Stands



Standard



- Accepts test indicators with dovetail clamping mechanism
- Dial gauges can be held by the 3/8" or 8mm diameter stem or by the lug backing plate
- The rotary knob switches magnet on or off
- The precision surfaces and the bottom V are securely fastened to the ferrous workpiece or machine table when the rotary knob is in the on position
- 910065 with Fine Adjustment

910064

910065

176.37lbf/80kgf
Code 910064

176.37lbf/80kgf
Code 910065

176.37lbf/80kgf
Code 910067

29.46

27.28

71.39

Ball-Bearing Drill Chucks & Key

For Production
Drilling Equipment

- Hardened and ground
- Fits tools up to 25mm (1")



LLAMBRICH

Capacity mm (Inch)	Mount	Dia. (mm)	Length Closed/Open (mm)	Weight (g)	Code	Price
1-13 (1/32-1/2)	J3	62	75/94	1,115	348144	240.66
1-16 (1/32-5/8)	J3	67	81/102	1,470	348145	298.53
1-19 (1/32-3/4)	J4	75	99/125	2,145	348146	386.50
5-25 (13/64-1)	J5	93	112/147	3,645	348147	630.60

Precision Keyless Drill Chucks



Capacity (Inch)	Mount	Code	Price
0 - 1/4	J1	354100	100.44
0 - 1/4	3/8-24	354102	100.44
0 - 3/8	J2	354106	127.50
0 - 3/8	3/8-24	354108	133.91
1/32 - 1/2	J6	354112	141.88
1/32 - 1/2	J33	354114	140.95
1/32 - 1/2	1/2-20	354116	133.63
1/8 - 5/8	J6	354120	172.51
1/8 - 5/8	5/8-16	354122	165.31

SUMMER SIZZLER

Jobber Length Drills

Solid Carbide & High Speed Steel Gold-P Coated



Solid Carbide | 118° Point

- For drilling steels in general – cast steels, cast iron, chilled cast iron, malleable cast iron, non-ferrous heavy metals, non-ferrous light metals, and abrasive plastics

* HSS GOLD-P drills 135° split point on sizes 0.059" diameter and over

Size (Inch)	Decimal (Inch)	SOLID CARBIDE				HSS GOLD-P COATED			
		118° POINT				135° SPLIT POINT			
		LOC (Inch)	OAL (Inch)	Code	Price	LOC (Inch)	OAL (Inch)	Code	Price
1/32	0.0312	5/16	1-1/4	952088	27. ⁵⁰	–	–	–	–
3/64	0.0469	3/4	1-1/2	952090	16. ⁰⁹	3/4	1-3/4	883020	1. ⁹⁰
1/16	0.0625	3/4	1-1/2	952092	16. ¹⁹	7/8	1-7/8	883021	1. ⁹⁶
5/64	0.0781	7/8	1-3/4	952094	17. ²⁴	1	2	883022	1. ⁹⁶
3/32	0.0938	1	2	952096	19. ⁵³	1-1/4	2-1/4	883023	1. ⁹⁶
7/64	0.1094	1-1/4	2-1/4	952098	21. ¹⁸	1-1/2	2-5/8	883024	1. ⁹⁶
1/8	0.1250	1-1/4	2-1/4	952100	22. ¹⁹	1-5/8	2-3/4	883025	1. ⁹⁶
9/64	0.1406	1-3/8	2-1/2	952102	26. ⁰⁵	1-3/4	2-7/8	883026	2. ⁰⁵
5/32	0.1563	1-3/8	2-1/2	952104	27. ⁴⁷	2	3-1/8	883027	2. ⁰⁸
11/64	0.1719	1-5/8	2-3/4	952106	32. ¹³	2-1/8	3-1/4	883028	2. ²⁰
3/16	0.1875	1-5/8	2-3/4	952108	32. ⁵⁷	2-5/16	3-1/2	883029	2. ⁵⁰
13/64	0.2031	1-3/4	3	952110	39. ¹²	2-7/16	3-5/8	883030	3. ⁰³
7/32	0.2188	1-3/4	3	952112	40. ²⁶	2-1/2	3-3/4	883031	3. ¹²
15/64	0.2344	2	3-1/4	952114	47. ⁹²	2-5/8	3-7/8	883032	3. ⁵⁵
1/4 (E)	0.2500	2	3-1/4	952116	47. ⁹²	2-3/4	4	883033	3. ⁸⁴
17/64	0.2656	2-1/8	3-1/2	952118	50. ⁶⁰	2-7/8	4-1/8	883034	4. ²⁷


HSS Gold-P Coated | *135° Split Point

- Straight shank
- Flute Geometry: right hand spiral with wider flutes
- Point Angle: 135° split point on sizes 0.059" diameter and over
- Surface treatment: bright body with TiN coating on working part
- Application: drilling in steel, cast steel (alloyed and non-alloyed), grey cast iron, graphite, and malleable cast iron

Size (Inch)	Decimal (Inch)	SOLID CARBIDE				HSS GOLD-P COATED			
		118° POINT				135° SPLIT POINT			
		LOC (Inch)	OAL (Inch)	Code	Price	LOC (Inch)	OAL (Inch)	Code	Price
9/32	0.2812	2-1/8	3-1/2	952120	54. ¹²	2-15/16	4-1/4	883035	4. ⁷⁴
19/64	0.2969	2-3/8	3-3/4	952122	60. ¹³	3-1/16	4-3/8	883036	5. ²⁶
5/16	0.3125	2-3/8	4	952124	63. ⁵⁵	3-3/16	4-1/2	883037	5. ⁷¹
21/64	0.3281	2-1/2	4	952126	69. ¹⁹	3-5/16	4-5/8	883038	6. ²⁵
11/32	0.3438	2-1/2	4-1/4	952128	76. ⁹³	3-7/16	4-3/4	883039	7. ⁰³
23/64	0.3594	2-3/4	4-1/4	952130	83. ⁸⁸	3-1/2	4-7/8	883040	7. ⁶⁵
3/8	0.3750	2-3/4	4-1/2	952132	91. ¹⁰	3-5/8	5	883041	7. ⁸⁵
25/64	0.3906	2-7/8	4-1/2	952134	102. ⁹²	3-3/4	5-1/8	883042	9. ⁰¹
13/32	0.4062	2-7/8	4-1/2	952136	114. ²⁰	3-7/8	5-1/4	883043	9. ³²
27/64	0.4219	2-7/8	4-1/2	952138	125. ⁰⁹	3-15/16	5-3/8	883044	9. ⁹⁷
7/16	0.4375	2-7/8	4-1/2	952140	135. ³⁴	4-1/16	5-1/2	883045	10. ⁹³
29/64	0.4531	3	4-3/4	952142	146. ⁵⁸	4-3/16	5-5/8	883046	12. ⁰⁷
15/32	0.4688	3	4-3/4	952144	157. ⁸¹	4-5/16	5-3/4	883047	12. ⁷⁷
31/64	0.4844	3	4-3/4	952146	162. ⁴⁷	4-3/8	5-7/8	883048	13. ⁶⁰
1/2	0.5000	3	4-3/4	952148	168. ⁴⁰	4-1/2	6	883049	14. ²⁷

Countersinks

Metric | Cobalt M35 | TiN Coated

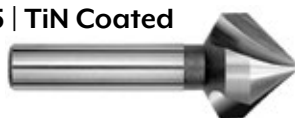

This highly productive countersinking cutter is a much improved version of the traditional multiflute milling cutter:

- wide flutes provide good chip evacuation
- positive cut
- constant profile aids regrinding of the tool
- self-centering of the cutting mill (three bearing points)
- virtually eliminates vibration
- Dimensions are adapted so as to sink 90 degree screw caps up to M12. We recommend lubricating

Overall Diameter (mm)	Shank Diameter (mm)	Chamfer Range Min/Max (mm)	Overall Length (Inch)	82° Angle Series 434	
				Code	Price
10.4	6	2.5-10.4	2	540311	43. ⁸²
16.5	10	3.2-16.5	2-1/4	540312	63. ⁹⁹
20.5	10	3.5-20.5	2-1/2	540313	71. ⁸¹
25.0	10	3.8-25	2-5/8	540314	87. ⁶²
31.0	12	4.2-31	2-3/4	540315	130. ³³

Carbide:
Diameter 12.4 to 31
= 3 flatted shanks
Diameter 4.3 to 8.3
= cylindrical shank
Diameter 10.4 to 31
= brazed carbide head
* Three gripping
flats on shank

Combined Drills & Countersinks

High Speed Steel M2

82° Angle | 60° Plain Type





Size	Body Diameter (Inch)	Point Diameter (Inch)	Point Length (Inch)	Overall Length (Inch)	Code	Price
000	1/8	0.020	1/32	1-1/4	540599	10. ⁴¹
0	1/8	1/32	3/64	1-1/4	540610	9. ⁰⁷
1	1/8	3/64	1/16	1-1/4	540611	8. ⁸⁸
2	3/16	5/64	7/64	1-7/8	540612	9. ³⁰
3	1/4	7/64	9/64	2	540613	9. ⁹⁶
4	5/16	1/8	5/32	2-1/8	540614	11. ⁴²
4-1/2	3/8	9/64	3/16	2-1/2	540604	14. ⁹⁵
5	7/16	3/16	1/4	2-3/4	540615	16. ⁶⁷
6	1/2	7/32	19/64	3	540616	21. ³⁹
7	5/8	1/4	5/16	3-1/4	540617	41. ⁰⁵
8	3/4	5/16	13/32	3-1/2	540618	66. ⁷³
9	7/8	11/32	7/16	3-5/8	540619	125. ⁰⁵
10	1	3/8	1/2	3-3/4	540598	137. ⁸⁰

SUMMER SIZZLER

Carbide Turning Inserts



CCMT | DCMT | RCMT | SCMT | TCMT | VBMT | CNMG | DNMG

Shape	ANSI	Grade	Chipbreaker	ØI.C. (Inch)	Thickness (Inch)	Radius (Inch)	Code	Price
	CCMT2(1.5)1UF	YG3125	UF	0.254	0.094	0.016	577700	11. ⁶²
	CCMT2(1.5)2UG	YG3125	UG	0.254	0.094	0.031	577701	11. ⁶²
	CCMT3(2.5)1UR	YG3125	UR	0.381	0.156	0.016	577702	13. ⁷⁰
	CCMT3(2.5)2UG	YG3125	UG	0.381	0.156	0.031	577703	13. ⁷⁰
	CCMT432UG	YG3125	UG	0.508	0.187	0.031	577704	16. ⁰²
	DCMT2(1.5)1UF	YG3125	UF	0.305	0.094	0.016	577705	12. ⁵⁸
	DCMT3(2.5)1UF	YG3125	UF	0.458	0.156	0.016	577706	14. ⁸²
	DCMT3(2.5)2UG	YG3125	UG	0.458	0.156	0.031	577707	14. ⁸²
	RCMT0602M0	YG3125	–	–	0.094	–	577708	11. ⁴⁶
	RCMT0803M0	YG3125	–	–	0.125	–	577709	12. ⁵⁸
	RCMT10T3M0	YG3125	–	–	0.156	–	577710	13. ⁷⁰
	RCMT1204M0	YG3125	–	–	0.187	–	577711	15. ⁴⁰
	SCMT3(2.5)1UF	YG3125	UF	0.375	0.156	0.016	577712	14. ⁸²
	SCMT3(2.5)2UG	YG3125	UG	0.375	0.156	0.031	577713	14. ⁸²
	TCMT2(1.5)1UF	YG3125	UF	0.433	0.094	0.016	577714	12. ⁵⁸
	TCMT3(2.5)1UF	YG3125	UF	0.650	0.156	0.016	577715	16. ⁵⁴
	TCMT3(2.5)2UG	YG3125	UG	0.650	0.156	0.031	577716	16. ⁵⁴
	VBMT331UF	YG3125	UF	0.654	0.187	0.016	577717	20. ⁴⁰
	VBMT332UG	YG3125	UG	0.654	0.187	0.031	577718	20. ⁴⁰
	CNMG431UF	YG3125	UF	0.508	0.187	0.016	577719	16. ⁰²
	CNMG432UG	YG3125	UG	0.508	0.187	0.031	577720	16. ⁰²
	CNMG433UR	YG3125	UR	0.508	0.187	0.047	577721	16. ⁰²
	DNMG431UF	YG3125	UF	0.610	0.187	0.016	577722	19. ³⁶
	DNMG432UG	YG3125	UG	0.610	0.187	0.031	577723	19. ³⁶
	SNMG431UF	YG3125	UF	0.500	0.187	0.016	577724	16. ⁰²
	SNMG432UG	YG3125	UG	0.500	0.187	0.031	577725	16. ⁰²
	SNMG433UR	YG3125	UR	0.500	0.187	0.047	577726	16. ⁰²
Steel	Cast Iron	YG3125	PI5-P35	YG3030	P20-P35	YG1010	K05-K15	

Can't find what you are looking for?
Ask your **KAR** Distributor for the full **YG-1** insert offering

SUMMER SIZZLER

Carbide Turning Inserts



SNMA | SNMG | TNMA | TNMG | TNUX | VNMG | WNMA | WNMG

Shape	ANSI	Grade	Chipbreaker	ØI.C. (Inch)	Thickness (Inch)	Radius (Inch)	Code	Price
	TNMG331UF	YG3125	UF	0.650	0.187	0.016	577727	14. ⁸²
	TNMG332UG	YG3125	UG	0.650	0.187	0.031	577728	14. ⁸²
	TNMG333UR	YG3125	UR	0.650	0.187	0.047	577729	14. ⁸²
	TNMG431UF	YG3125	UF	0.866	0.187	0.016	577730	18. ¹⁴
	TNMG432UG	YG3125	UG	0.866	0.187	0.031	577731	18. ¹⁴
	TNMG433UR	YG3125	UR	0.866	0.187	0.047	577732	18. ¹⁴
	VNMG331UF	YG3125	UF	0.650	0.375	0.016	577733	20. ⁴⁰
	VNMG332UG	YG3125	UG	0.654	0.375	0.031	577734	20. ⁴⁰
	VNMG333UR	YG3125	UR	0.650	0.375	0.047	577735	20. ⁴⁰
	WNMG331UF	YG3125	UF	0.254	0.187	0.016	577736	13. ⁷⁰
	WNMG332UG	YG3125	UG	0.254	0.187	0.031	577737	13. ⁷⁰
	WNMG431UF	YG3125	UF	0.342	0.187	0.016	577738	16. ⁰²
	WNMG432UG	YG3125	UG	0.342	0.187	0.031	577739	16. ⁰²
	WNMG433UR	YG3125	UR	0.320	0.187	0.047	577740	16. ⁰²

Steel	Cast Iron	YG3125	PI5-P35	YG3030	P20-P35	YG1010	K05-K15
-------	-----------	--------	---------	--------	---------	--------	---------

Colour Band Taps



High Speed Steel – Spiral Point Plug Style – 60° Point

		General Purpose				Hard Materials				Soft Materials			
Material													
Alloyed High Carbon Steel		✓											
Aluminum		✓								✓			
Brass/Bronze										✓			
Cast Iron										✓			
Copper										✓			
High Strength Steel		✓				✓							
Low Carbon Steel										✓			
Medium Carbon Steel		✓								✓			
Nickel Alloys						✓							
Stainless Steel		✓				✓							
Titanium		✓				✓							
Tool Steel		✓				✓							
Size	Overall Length (Inch)	No. of Flutes	Thread Length (Inch)	Code	Price	No. of Flutes	Thread Length (Inch)	Code	Price	No. of Flutes	Thread Length (Inch)	Code	Price
4-40	1-7/8	2	0.335	915060	11.11	2	0.335	915258	28.46	2	0.313	915170	7.86
6-32	2	3	0.413	915062	11.69	3	0.413	915262	23.69	2	0.375	915172	8.27
8-32	2-1/8	3	0.453	915066	11.69	3	0.453	915264	23.69	2	0.375	915176	8.27
10-32	2-3/8	3	0.531	915070	11.69	3	0.531	915268	23.69	2	0.500	915180	8.27
1/4-20	2-1/2	3	0.591	915074	13.49	3	0.591	915270	28.20	2	0.625	915184	9.59
5/16-18	2-23/32	3	0.669	915078	16.90	3	0.669	915274	31.25	2	0.688	915188	12.71
3/8-16	2-15/16	3	0.748	915082	17.26	3	0.748	915278	35.90	3	0.750	915192	12.97
1/2-13	3-3/8	3	0.984	915090	31.06	3	0.984	915286	56.22	3	0.938	915200	23.33
5/8-11	3-13/16	3	1.083	915094	32.08	3	1.083	915290	129.46	3	1.094	915204	23.97
3/4-10	4-1/4	3	1.201	915098	45.27	3	1.201	915294	167.29	3	1.219	915208	33.92

SUMMER SIZZLER



Magnifier Work Lights

Long Arm | JML-15RLD

- Built in LED Driver to connect to AC power
- High voltage power 100V-240V with plug

Code 302303

254.74

LED Machine Lamps

Coolant Proof – IP20 | JHL-35R Series

- Built in LED Driver with Coil Transformer
- High voltage power 100V-260V with plug
- 3W LED lamp (3 x 1W LEDs)
- Coolant proof – IP20
- Various lighting angles: 30°, 45°, 60°
- Impact resistant clear lens
- Supplied with 1.8 meter power connection cord
- Engineered double plastic shade design allows fast heat dissipation

Short
Code 302307


219.96

18 (9+9)
Code 302308

222.39

32 (16+16)
Code 302309

224.74

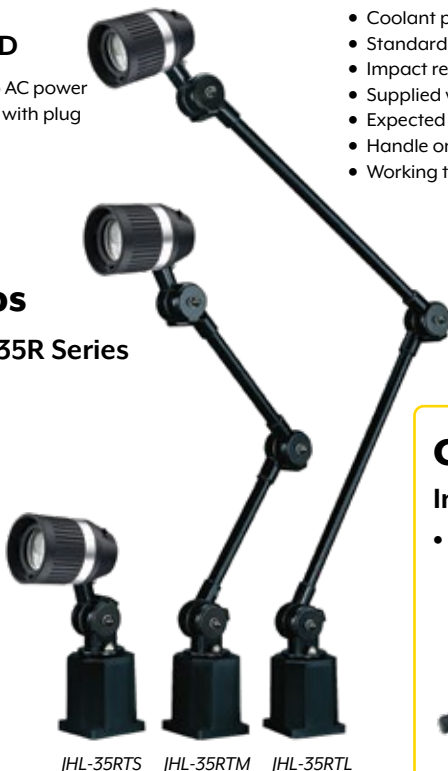

JHL-35RTS JHL-35RTM JHL-35RTL

LED Machine Lamps

Coolant Proof – IP65 | JWL-55N Series

- LED driver in base
- High voltage power 100V-260V with plug
- 12W LED lamp (6 x 2W LEDs)
- Coolant proof – IP65
- Standard light beam angle: 60°
- Impact resistant clear lens
- Supplied with 1.8 meter power connection cord
- Expected lamp life of 40,000 hours
- Handle on head allows easy positioning
- Working temperature range: -30°C to +60°C



JWL-55NTS JWL-55RNTM JWL-55RNTL

JWL-55NTS – Short
Code 302992

244.55

JWL-55NTM – 18"
Code 302993

255.53

JWL-55NTL – 32"
Code 302994

260.43

Cross-Slide Table

Inch | Double Axis | Fixed Base

- General tolerance ± 0.03 "



Model: 340 XY

Stroke X Axis: 100mm + 100mm

Stroke Y Axis: 70mm + 70mm

Weight: 60lbs | Code 266524

3073.40

Model: 800 XY

Stroke X Axis: 250mm + 250mm

Stroke Y Axis: 125mm + 125mm

Poids: 60lbs | Code 266530

7211.78

WHILE QUANTITIES LAST | FOR MORE DIMENSIONS

WWW.KAR.CA

Tool Trolleys

With #40 & #50 Inserts



#40 Inserts | Code 214240
#50 Inserts | Code 214250

6.62/ea.

866.38/ea.

With 28 pcs. #40 Inserts | Code 214140
With 20 pcs. #50 Inserts | Code 214150

BLOWOUT PRICES!

WHILE QUANTITIES LAST

Clamping Sets

Tabletop Style




Table Slot: 13/16
Stud Size: 3/4-10
Block Width: 1-1/2
Code 400035

574.02

Table Slot: 7/8
Stud Size: 3/4-10
Block Width: 1-1/2
Code 400040

574.02

Table Slot: 1
Stud Size: 7/8-9
Block Width: 2
Code 400045

760.52

SUMMER SIZZLER

Tool Clamping Fixtures




Fixed Vise Head



Rotary

MULTIPLE USE TOOL CLAMPS FOR
TOOL SHANK ISO – DIN 69871
CAT & BT-MAS

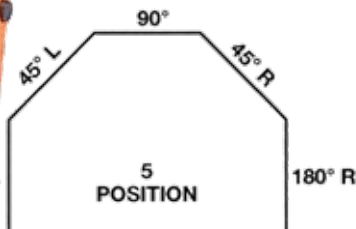

- Easy access for combined assembly of cutting tool and pull stud
- Head fixture can be set in five positions: vertical, horizontal and 45° (left and right)
- Efficiently designed for maximum protection of tool holder
- Enables strong gripping power of cutting tools
- Compact design - can be mounted on work table or tool cart

#40 ROTARY
Code 827695

287.12

#50 ROTARY
Code 827696

362.96

#40 FIXED
Code 827697

97.68

#50 FIXED
Code 827698

137.98

Power Table Feed

X-Axis

- Smooth running with high torque maximum of 650 in/lb
- New and stronger design assures long trouble-free life
- Electrical and mechanical parts are designed for easy maintenance

Specifications:

Voltage: 110V, 50/60Hz
Speed Range: 4-160 RPM
Rapid Speed: 200 RPM
Max. Torque: 650 lbs/in
Dimensions:
290 x 200 x 320mm

X-Axis | Code 302235

999.99



Carbide Burrs

Various Shapes & Sizes



20% OFF Starting at... \$3.90

SEE MORE HERTEL Production Grade Tooling | www.kar.ca

Fixed Bench Vises



- Graded cast iron body
- Hardened and ground alloy steel jaws
- Perfectly aligned vise for smooth functioning

3" x 3-3/8" Opening
Code 416250

81.44

4" x 4" Opening
Code 416251

121.85

5" x 5" Opening
Code 416252

162.56

6" x 6" Opening
Code 416253

241.28

Shop Rolls

50 Yards (22.86 meters) x 3 Rolls
Aluminum Oxide | Coated

TRU-MAXX®



Size	Grade	Grit	Code	Price
1" x 50 yd	Medium	120	01135995	44.95
1" x 50 yd	Medium	80	01136019	40.06
1" x 50 yd	Medium	60	01136027	39.47
1-1/2" x 50 yd	Fine	120	01136118	64.57
2 x 50 yd	Medium	80	04009346	71.48
2 x 50 yd	Medium	60	04009353	77.29

Abrasive Roll Kits

25 Yards (22.86 meters) x 3 Rolls
Aluminum Oxide | Coated

TRU-MAXX®



52437712 - Fine, Very Fine

Individual replacement rolls available

Size	Grade	Grit	Code	Price
1" x 25 yd	Fine, Very Fine	120, 180, 240	52437712	88.41
1" x 25 yd	Medium, Fine, Very Fine	80, 120, 180	52437720	88.41
1-1/2" x 25 yd	Fine, Very Fine	120, 180, 240	52437761	128.08
1-1/2" x 25 yd	Medium, Fine, Very Fine	80, 120, 180	52437779	128.08
2" x 25 yd	Fine, Very Fine	120, 180, 240	52437746	167.95
2" x 25 yd	Medium, Fine, Very Fine	80, 120, 180	52437753	164.44

SUMMER SIZZLER

CERAMIX Sets

Heavy Duty Handles with Ceramic Blades

- Adjust cutting angle between blade and material for best results and prevent scratches
- Blade can be flipped for two types of jobs

SHAVIV
Leading Deburring Solutions



SET Q10

Heavy Duty Handle with Ceramic Q10 Blade



Q10 Set
with Q10 Blade
Code 550722

32.15



SET Q12

Heavy Duty Handle with Curved Ceramic Q11 Blade




Q12 Set
with Q11 Blade
Code 550726

32.15



Individual Ceramic Blades

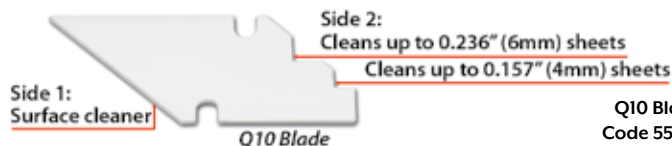

Q10 Blade
Code 550723

24.36



Q11 Curved Blade
Code 550728

24.36

Maintenance File Set **CRESCENT NICHOLSON**

9 Pieces

- For home and professional use
- 10"/250mm flat bastard file, flat smooth file, mill bastard file, half-rounded bastard, round bastard file
- 8"/200mm flat smooth file, half-round bastard file, and four-in-hand file
- 6"/150mm slim taper file
- Complete set fits securely into rugged, compact pouch



Code 60304896

212.91

Scrape Burrs

SHAVIV
Leading Deburring Solutions

Scrape-Burr 42 The Heavy Duty Scraper

- Durable and secure
- Permanent heavy duty triangular blade with three cutting edges for high quality finishing and scraping



Code 550975

23.83

Scrape-Burr 40 The All-Purpose Scraper

- Useful and convenient all-purpose standard scraper
- Permanent heavy duty triangular blade with three cutting edges for high quality finishing and scraping



Code 550974

16.48

Scrape-Burr 400 The Fine Finish Scraper

- Miniature tool for a fine finish on precision work pieces
- Extra thin, heavy duty triangular blade with three cutting edges for high quality and accurate finishing and scraping



Code 550976

11.47

SHAVIV

Exclusively Available at **KAR** in Canada

Machinist's Tools

Individual & 3 Piece Set



Tungsten Carbide Scriber



Automatic Center Punch



Pocket Magnet Pick-up

3 Piece Set

Code 455505

40.08

SCRIBER
Code 455501

13.05

CENTER PUNCH
Code 455502

13.05

MAGNETIC PICK-UP
Code 455503

13.97

Pocket Scriber

Code 460070



7.92

- Hardened steel point is reversible for protection when not in use
- Overall length: 89mm - 3-1/2"



KAR Industrial Inc.
www.kar.ca

Offer valid until September 30, 2026

*Products shown may not be exactly as illustrated Code 000352

MAKING IT EASY TO DO BUSINESS WITH SINCE 1954... CONTACT YOUR LOCAL KAR DISTRIBUTOR TODAY!